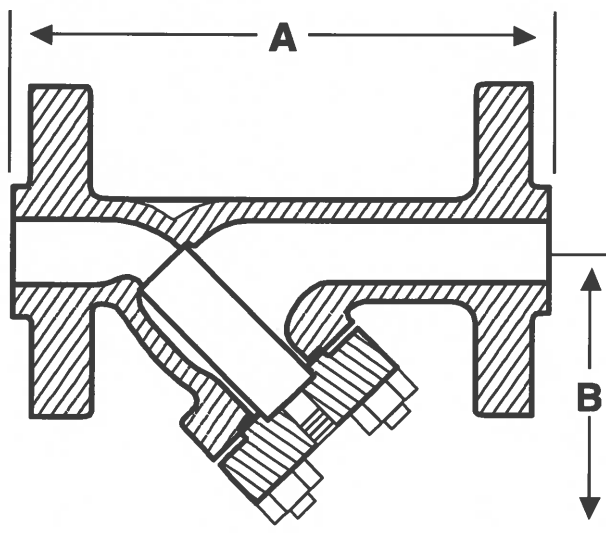


ALTA

MODEL NYF 900
900# ANSI CARBON STEEL
RAISED FACE / RTJ FLANGED
"Y" STRAINER

DRAWING A 75

DESCRIPTION	MATERIAL
BODY	ASTM A216 GR. WCB
COVER	ASTM A216 GR. WCB
STUD	ASTM A193 GR. B7
NUT	ASTM A194 GR. 2H
GASKET	SPIRAL WOUND SS
SCREEN	304 SS 1/8 PERF

TEMPERATURE		WORKING PRESSURE	
C	F	kPa	P.S.I.
-29 to 38	-20 to 100	15305	2220
95	200	13960	2025
150	300	13585	1970
200	400	13100	1900
260	500	12375	1795

FLANGES ARE IN ACCORDANCE WITH ANSI B16.5

ALL STRAINERS ARE INDIVIDUALLY HYDROSTATICALLY TESTED TO ANSI B16.5

SIZE		DIMENSIONS						SCREEN REMOVAL		NET WEIGHT	
		A		B		DRAIN					
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	Kg.	Lbs.
50	2	349	13 3/4	215	8 1/4	25	1	273	10 3/4	38	84
80	3	464	18 1/2	292	11 1/2	25	1	330	13	61	136
100	4	498	19 5/8	304	12	40	1 1/2	355	14	79	190
150	6	704	27 3/4	457	18	50	2	562	23	234	515
200	8	845	33 1/4	546	21 1/2	50	2	711	28	406	895

LARGER SIZES AVAILABLE . PLEASE CONTACT US FOR DIMENSIONS .

FEATURES

BODY HAS A MACHINED SEAT TO HOLD SCREEN SECURELY.

COVER HAS A MACHINED SCREEN HOLDER TO ALIGN SCREEN DURING INSTALLATION AND TO RETAIN SEDIMENT WHEN COVER IS REMOVED.

BODY IS MACHINED TO HOLD COVER GASKET IN A BLOW-OUT PROOF DESIGN.

FLANGES ARE BACK FACED OR SPOT FACED.