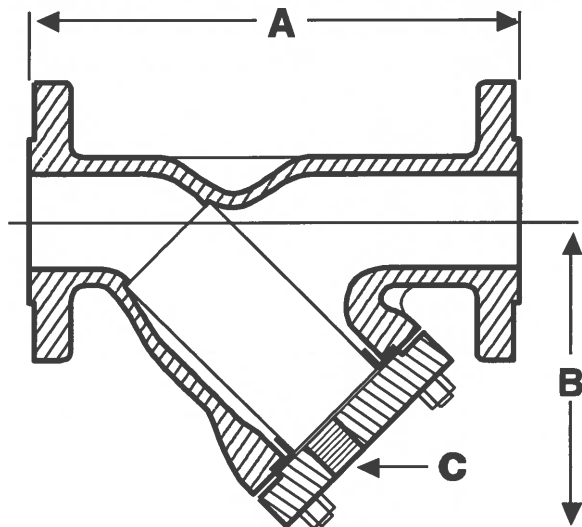


ALTA

**MODEL NYF 300 SS
300# ANSI STAINLESS STEEL
RAISED FACED FLANGED
"Y" STRAINER**

DRAWING A 35

DESCRIPTION	MATERIAL
BODY	ASTM A351 GR. CF8M
COVER	ASTM A351 GR. CF8M
STUD	ASTM A 193 GR. B8
NUT	ASTM A 194 GR. B8
GASKET	TEFLON
SCREEN	304 SS 1/8 PERF

TEMPERATURE		WORKING PRESSURE	
C	F	kPa	P.S.I.
-29 to 38	-20 to 100	4965	720
95	200	4275	620
150	300	3860	560
200	400	3550	515

FLANGES ARE IN ACCORDANCE WITH ANSI B16.5

ALL STRAINERS ARE INDIVIDUALLY HYDROSTATICALLY TESTED TO ANSI B16.5

SIZE		DIMENSIONS						SCREEN REMOVAL		NET WEIGHT	
		A		B		C					
mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	Kg.	Lbs.
50	2	219	8 5/8	158	6 1/4	20	3/4	177	7	12.7	28
80	3	304	12	209	8 1/4	25	1	254	10	25	56
100	4	368	14 1/2	292	11	40	1 1/2	431	17	44	98
150	6	490	19 1/2	355	14	50	2	558	22	79	175
200	8	593	23 3/8	460	18 1/8	50	2	863	34	143	315
250	10	695	27 3/8	584	23	50	2	1066	42	225	495

LARGER SIZES AVAILABLE . PLEASE CONTACT US FOR DIMENSIONS.

FEATURES

BODY HAS A MACHINED SEAT TO HOLD SCREEN SECURELY.

COVER HAS A MACHINED SCREEN HOLDER TO ALIGN SCREEN DURING INSTALLATION AND TO RETAIN SEDIMENT WHEN COVER IS REMOVED.

BODY IS MACHINED TO HOLD COVER GASKET IN A BLOW-OUT PROOF DESIGN.